

Overview

The KEMET RG aluminum metal cylinder filters cover single-phase requirements. These filters are optimized for conduction noise. Their input/output terminals are Faston® type.

Applications

- Industrial equipment
- Electronic equipment

Benefits

- Single-phase 250 VAC
- Current 8 A
- Operating temperature range from -25°C to +55°C
- UL or UL and TÜV approved versions available
- RoHS compliant



Part Number System

RG-	2	08	F
Series	Phase	Rated Current (A)	Specification
RG	2 = Single-phase	0x = 0x A	F = High inductance F2 = Compact

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
 Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
 Брянск (4832)59-03-52
 Владивосток (423)249-28-31
 Владикавказ (8672)28-90-48
 Владимир (4922)49-43-18
 Волгоград (844)278-03-48
 Вологда (8172)26-41-59
 Воронеж (473)204-51-73
 Екатеринбург (343)384-55-89

Россия +7(495)268-04-70

Иваново (4932)77-34-06
 Ижевск (3412)26-03-58
 Иркутск (395)279-98-46
 Казань (843)206-01-48
 Калининград (4012)72-03-81
 Калуга (4842)92-23-67
 Кемерово (3842)65-04-62
 Киров (8332)68-02-04
 Коломна (4966)23-41-49
 Кострома (4942)77-07-48
 Краснодар (861)203-40-90
 Красноярск (391)204-63-61
 Курск (4712)77-13-04
 Курган (3522)50-90-47
 Липецк (4742)52-20-81

Казахстан +7(7172)727-132


Магнитогорск (3519)55-03-13
 Москва (495)268-04-70
 Мурманск (8152)59-64-93
 Набережные Челны (8552)20-53-41
 Нижний Новгород (831)429-08-12
 Новокузнецк (3843)20-46-81
 Ноябрьск (3496)41-32-12
 Новосибирск (383)227-86-73
 Омск (3812)21-46-40
 Орел (4862)44-53-42
 Оренбург (3532)37-68-04
 Пенза (8412)22-31-16
 Петрозаводск (8142)55-98-37
 Псков (8112)59-10-37
 Пермь (342)205-81-47

Киргизия +996(312)96-26-47

Ростов-на-Дону (863)308-18-15
 Рязань (4912)46-61-64
 Самара (846)206-03-16
 Саранск (8342)22-96-24
 Нижний Новгород (831)429-08-12
 Санкт-Петербург (812)309-46-40
 Саратов (845)249-38-78
 Севастополь (8692)22-31-93
 Симферополь (3652)67-13-56
 Смоленск (4812)29-41-54
 Сочи (862)225-72-31
 Ставрополь (8652)20-65-13
 Сургут (3462)77-98-35
 Сыктывкар (8212)25-95-17
 Тамбов (4752)50-40-97
 Тверь (4822)63-31-35

Тольятти (8482)63-91-07
 Томск (3822)98-41-53
 Тула (4872)33-79-87
 Тюмень (3452)66-21-18
 Ульяновск (8422)24-23-59
 Улан-Удэ (3012)59-97-51
 Уфа (347)229-48-12
 Хабаровск (4212)92-98-04
 Чебоксары (8352)28-53-07
 Челябинск (351)202-03-61
 Череповец (8202)49-02-64
 Чита (3022)38-34-83
 Якутск (4112)23-97-97
 Ярославль (4852)69-52-93

Dimensions – Millimeters

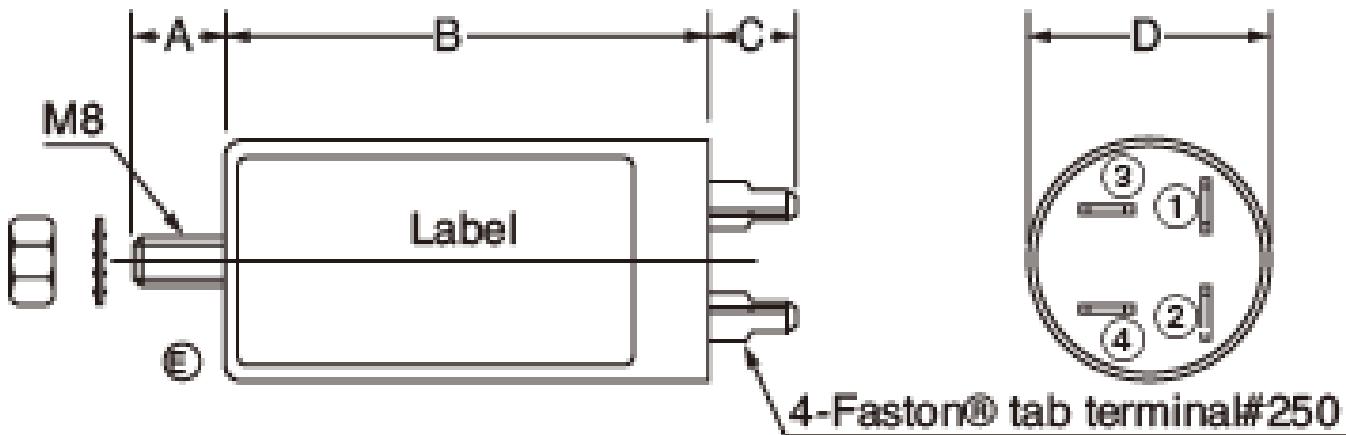

Faston® is a registered trademark of Tyco Electronics AMP.

Part Number	A	B	C	D
RG-208F	12	90		
RG-208F2		60	13	50

Environmental Compliance

KEMET RG EMI-RFI Filters comply with EU RoHS Directive 2011/65/EU and (EU) 2015/863. Products that fall under the exemptions listed in below table are also included.



Part Number	RoHS Compliant	RoHS Exemption Code
RG-208F	Yes	7(c)-I
RG-208F2	Yes	7(c)-I

Code	Exemption
7(c)-I	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectric devices, or in a glass or ceramic matrix compound

Approvals

Certification Body	File Number	Part Number
UL	E59551	RG-208F2
TÜV Rheinland Japan Ltd.	R50006637	RG-208F
	R50013629	RG-208F2

Performance Characteristics


Item	Performance Characteristics
Rated Voltage	250 V
Rated Current	8 A
Withstanding Voltage	1,500 VAC (1 minute, line to ground)
Insulation Resistance	300 MΩ minimum at 500 VDC (1 minute, line to ground)
Leakage Current	1 mA maximum at 250 V/60 Hz
Input/Output Terminal Type	Faston®
Operating Temperature Range	-25°C to +55°C (not including self temperature rise)

Table 1 – Ratings & Part Number Reference


Part Number	Phase	Rated Voltage AC/DC (V)	Rated Current AC/DC (A)	Leakage Current at 250 V/60 Hz (mA) Maximum	Temperature Rise (K) Maximum	Operating Temperature Range	Terminal Type	Approval	Weight (g)
RG-208F	Single-phase	250	8	1	55	-25°C to +55°C	Faston®	TÜV	320
RG-208F2	Single-phase	250	8	1	55	-25°C to +55°C	Faston®	UL and TÜV	220

Circuit Diagram

RG-208F

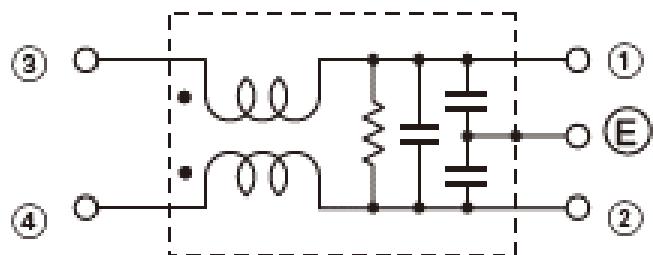


RG-208F2

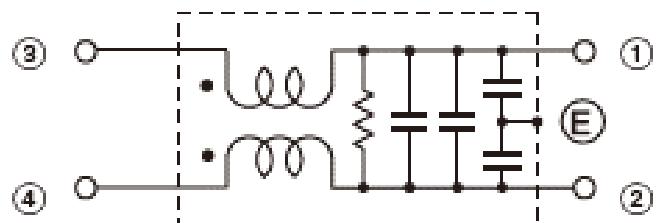



Note: (E) represents a screw installation portion (M8)

Measuring Circuit - Common Mode

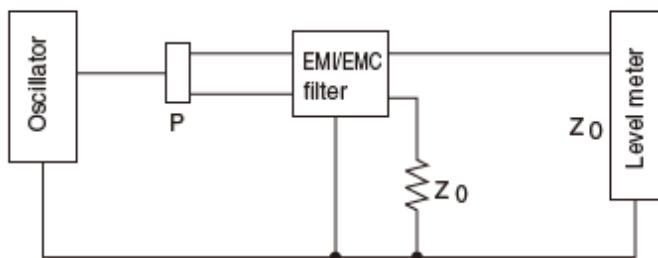

P: Power divider $Z_0 : 50\Omega$

Attenuation (Static Characteristics)

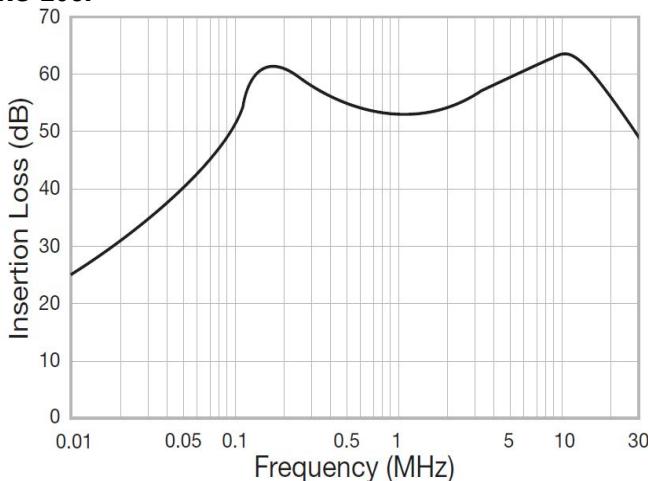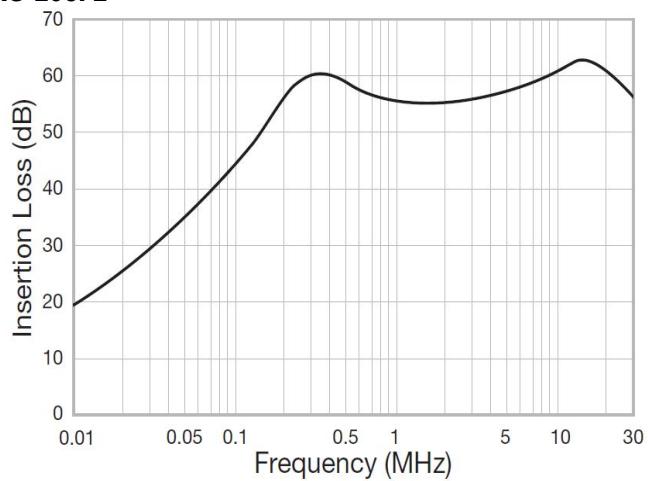RG-208F**RG-208F2**

Packaging

Part Type	Packaging Type	Pieces per Box
RG-2**F*	Tray	25

Handling Precautions

Precautions for product storage

EMI-RFI Filters should be stored in normal working environments. While the filters themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40°C, maximum storage humidity not exceed 70% relative humidity, and atmospheres should be free of chlorine and sulfur bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. Also, avoid storage near strong magnetic fields as this might magnetize the product.

EMI-RFI Filters' stock should be used promptly, preferably within 12 months of receipt.

Overview

The KEMET VC aluminum metal cylinder filters cover single-phase requirements. These filters are optimized for conduction noise. Their input/output terminals are Faston® type.

Applications

- Industrial equipment
- Electronic equipment

Benefits


- Single-phase 250 VAC
- Current 15 A
- Operating temperature range from -25°C to +55°C
- TÜV approved
- RoHS compliant



Part Number System

VC-	2	15	F3V
Series	Phase	Rated Current (A)	Specification
VC	2 = Single-phase	xx = xx A	F3V = Standard

Dimensions – Millimeters

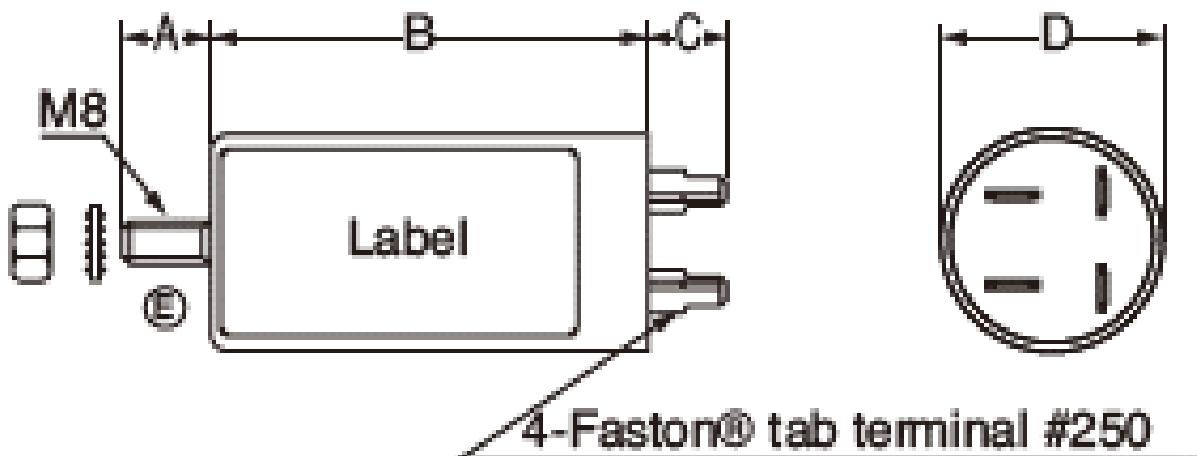

Recommended torque (N·m) maximum

- Earth terminal (M4: 4.41)

Faston® is a registered trademark of Tyco Electronics AMP.

Part Number	A	B	C	D
VC-215F3V	12	60	12	38

Environmental Compliance

KEMET VC EMI-RFI Filters comply with EU RoHS Directive 2011/65/EU and (EU) 2015/863. Products that fall under the exemptions listed in below table are also included.



Part Number	RoHS Compliant	RoHS Exemption Code
VC-215F3V	Yes	7(c)-I

Code	Exemption
7(c)-I	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound

Approvals

Certification Body	File Number	Part Number
TÜV Rheinland Japan Ltd.	R50013342	VC-215F3V

Performance Characteristics

Item	Performance Characteristics
Rated Voltage	250 V
Rated Current	15 A
Withstanding Voltage	1,500 VAC (1 minute, line to ground)
Insulation Resistance	300 MΩ minimum at 500 VDC (1 minute, line to ground)
Leakage Current	1.5 mA maximum at 250 V/60 Hz
Input/Output Terminal Type	Faston®
Operating Temperature Range	-25°C to +55°C (not including self temperature rise)



Table 1 – Ratings & Part Number Reference

Part Number	Phase	Rated Voltage AC/DC (V)	Rated Current AC/DC (A)	Leakage Current at 250 V/60 Hz (mA) Maximum	Temperature Rise (K) Maximum	Operating Temperature Range	Terminal Type	Approval	Weight (g)
VC-215F3V	Single-phase	250	15	1.5	40	-25°C to +55°C	Faston®	TÜV	110

Circuit Diagram

VC-215F3V


Measuring Circuit - Common Mode

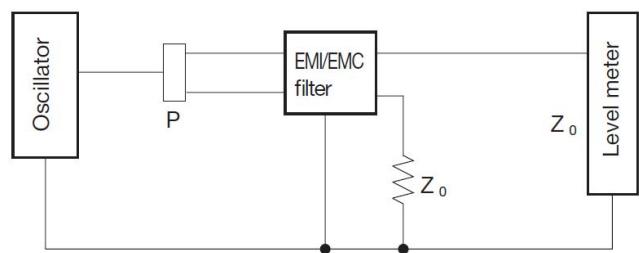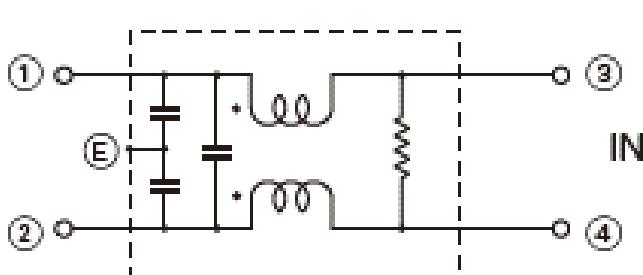

P: Power divider $Z_0: 50\Omega$

Note: E represents a case.

Attenuation (Static Characteristics)

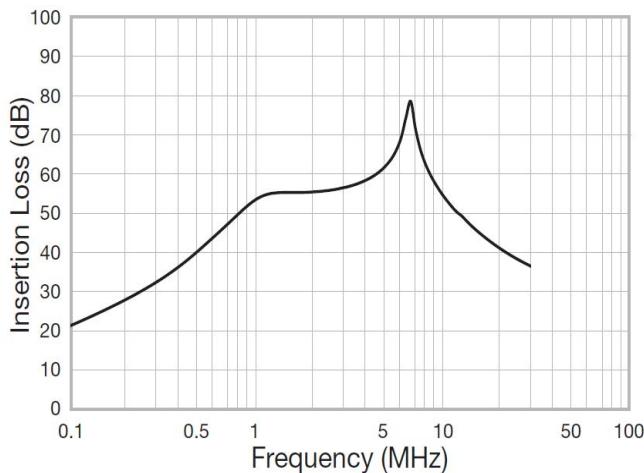VC-215F3V

Packaging

Part Type	Packaging Type	Pieces per Box
VC-215F3V	Tray	60

Handling Precautions

Precautions for product storage

EMI-RFI Filters should be stored in normal working environments. While the filters themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40°C, maximum storage humidity not exceed 70% relative humidity, and atmospheres should be free of chlorine and sulfur bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. Also, avoid storage near strong magnetic fields as this might magnetize the product.

EMI-RFI Filters' stock should be used promptly, preferably within 12 months of receipt.

Overview

The KEMET VU compact aluminum metal cylinder filters cover single-phase requirements with a wide variety of characteristics. These filters are optimized for conduction noise. Their input/output terminals are Faston® type.

Applications

- Industrial equipment
- Electronic equipment

Benefits


- Single-phase 250 VAC
- Current range from 15 to 20 A
- Operating temperature range from -25°C to +55°C
- UL and CSA or UL, CSA, and TÜV approved versions available
- RoHS compliant



Part Number System

VU-	2	20	F
Series	Phase	Rated Current (A)	Specification
VU	2 = Single-phase	0x = 0x A xx = xx A	F = Standard F3 = Low height

Dimensions – Millimeters

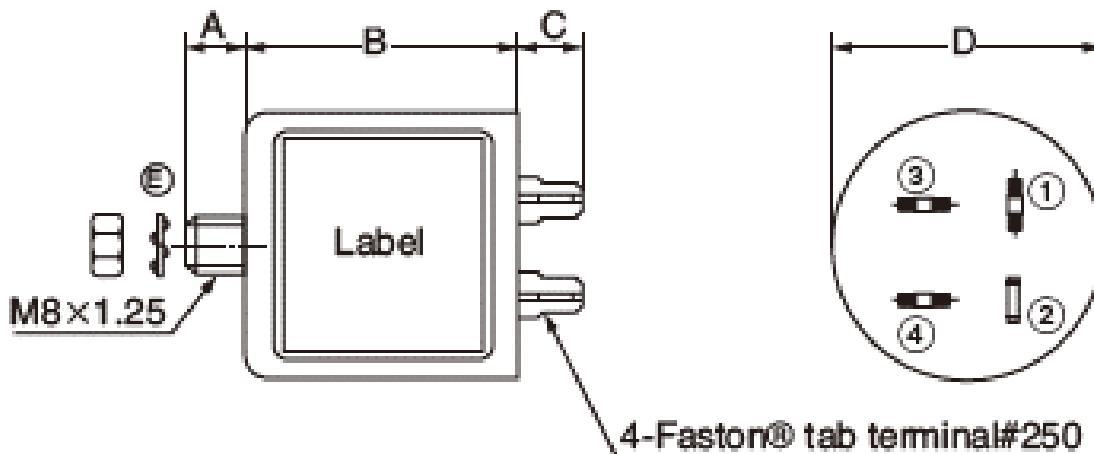

Recommended torque (N·m) maximum

- Earth terminal (M4: 4.41)

Faston® is a registered trademark of Tyco Electronics AMP.

Part Number	A	B	C	D
VU-215F		50	12	38
VU-215F3	12	40	13	45
VU-220F		50	12	50

Environmental Compliance

KEMET VU EMI-RFI Filters comply with EU RoHS Directive 2011/65/EU and (EU) 2015/863.

Products that fall under the exemptions listed in below table are also included.



Part Number	RoHS Compliant	RoHS Exemption Code
VU-215F	Yes	7(c)-I
VU-215F3	Yes	7(c)-I
VU-220F	Yes	7(c)-I

Code	Exemption
7(c)-I	Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectric devices, or in a glass or ceramic matrix compound

Approvals

Certification Body	File Number	Part Number
UL	E59551	VU-215F, VU-215F3 and VU-220F
CSA	LR50413	VU-215F, VU-215F3 and VU-220F
TÜV Rheinland Japan Ltd.	R50015793	VU-220F

Performance Characteristics

Item	Performance Characteristics
Rated Voltage	250 V
Rated Current Range	15 – 20 A
Withstanding Voltage	1,500 VAC (1 minute, line to ground)
Insulation Resistance	300 MΩ minimum at 500 VDC (1 minute, line to ground)
Leakage Current	1 mA maximum at 250 V/60 Hz
Input/Output Terminal Type	Faston®
Operating Temperature Range	-25°C to +55°C (not including self temperature rise)



Table 1 – Ratings & Part Number Reference

Part Number	Phase	Rated Voltage AC/DC (V)	Rated Current AC/DC (A)	Leakage Current at 250 V/60 Hz (mA) Maximum	Temperature Rise (K) Maximum	Operating Temperature Range	Terminal Type	Approval	Weight (g)
VU-215F	Single-phase	250	15	1	40	-25°C to +55°C	Faston®	UL and CSA	130
VU-215F3	Single-phase	250	15	1	40	-25°C to +55°C	Faston®	UL and CSA	105
VU-220F	Single-phase	250	20	1	40	-25°C to +55°C	Faston®	UL, CSA and TÜV	240


Circuit Diagram

VU-215F, VU-220F

VU-215F3


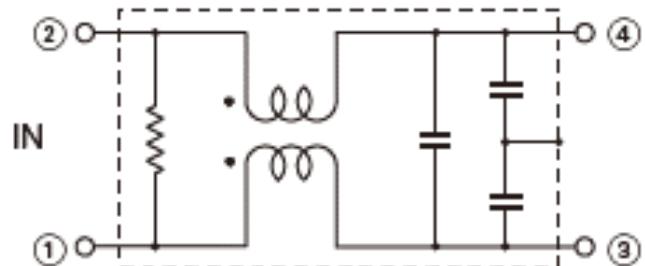
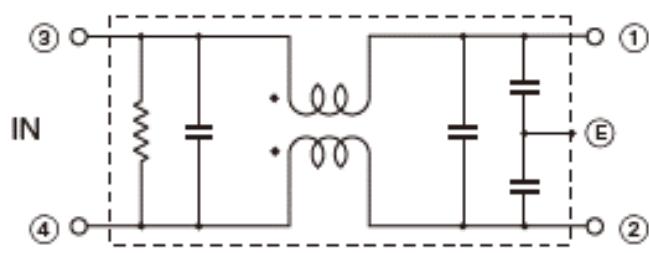


Measuring Circuit - Common Mode

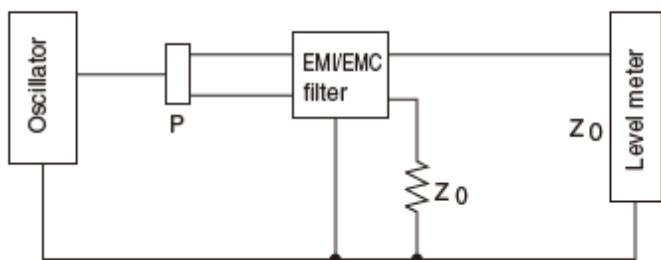

P: Power divider $Z_0 : 50\Omega$

Attenuation (Static Characteristics)

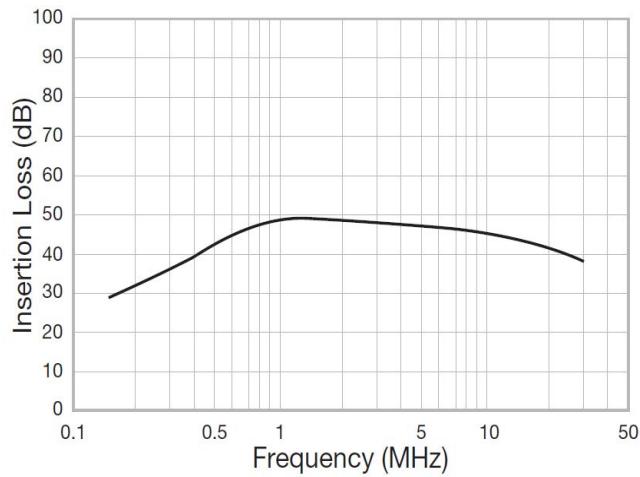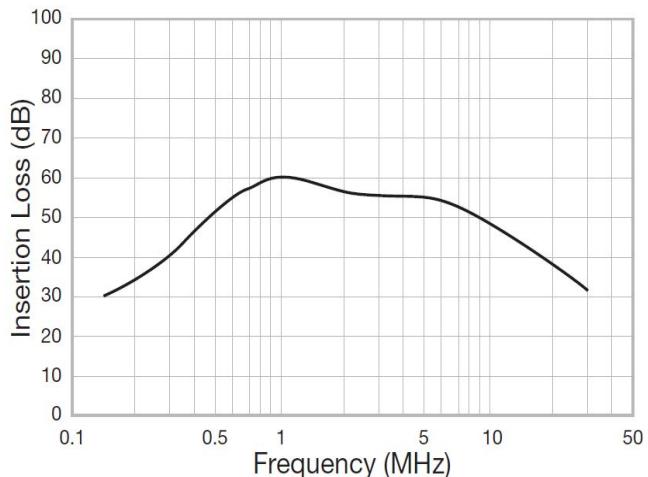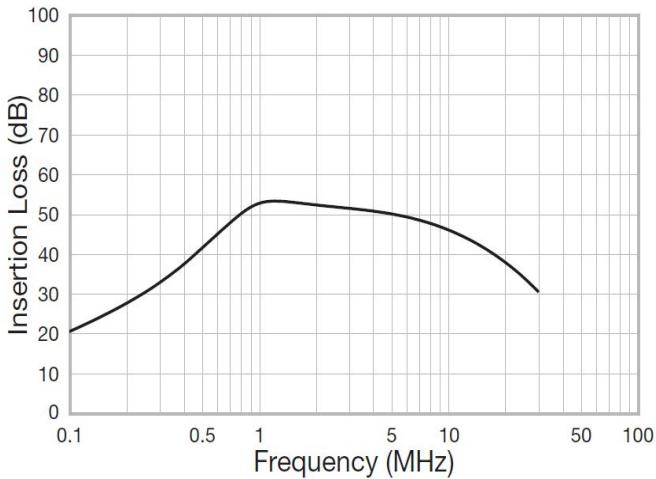VU-215F3**VU-220F****VU-215F**

Packaging

Part Type	Packaging Type	Pieces per Box
VU-215F	Tray	30
VU-215F3		60
VU-220F		25

Handling Precautions

Precautions for product storage

EMI-RFI Filters should be stored in normal working environments. While the filters themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage.

KEMET recommends that maximum storage temperature not exceed 40°C, maximum storage humidity not exceed 70% relative humidity, and atmospheres should be free of chlorine and sulfur bearing compounds. Temperature fluctuations should be minimized to avoid condensation on the parts. Also, avoid storage near strong magnetic fields as this might magnetize the product.

EMI-RFI Filters' stock should be used promptly, preferably within 12 months of receipt.

Алматы (7273)495-231
 Ангарск (3955)60-70-56
 Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
 Барнаул (3852)73-04-60
 Белгород (4722)40-23-64
 Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
 Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
 Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Россия +7(495)268-04-70

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Казахстан +7(7172)727-132

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47
Киргизия +996(312)96-26-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Саранск (8342)22-96-24
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93